

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** LOOM Design

**Supplier's address:** Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

**Model identifier:** 807-002

## Type of light source:

|   |      |                                 |      |
|---|------|---------------------------------|------|
| Lighting technology used:                           | LED  | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | LED  |                                 |      |
| Mains or non-mains:                                 | NMLS | Connected light source (CLS):   | Yes  |
| Colour-tuneable light source:                       | No   | Envelope:                       | -    |
| High luminance light source:                        | No   |                                 |      |
| Anti-glare shield:                                  | No   | Dimmable:                       | No   |

## Product parameters

| Parameter  | Value                | Parameter  | Value   |
|--|----------------------|--|---|
| <b>General product parameters:</b>   |                      |  |   |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer  | 9                    | Energy efficiency class  | F   |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 910 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700   |
| On-mode power ( $P_{on}$ ), expressed in W   | 9,0                  | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal   | 0,00  |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal  | 0,00                 | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set   | 83  |
| Outer dimensions without separate control gear, lighting control   | Height               | 1  | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
|  | Width                | 10   |   |
|  | Depth                | 11   |   |
|  |                      |  | See image in last page  |


|   |      |                                    |                |
|---|------|------------------------------------|----------------|
| parts and non-lighting control parts, if any (millimetre) |      |                                    |                |
| Claim of equivalent power <sup>(a)</sup>                  | -    | If yes, equivalent power (W)       | -              |
|   |      | Chromaticity coordinates (x and y) | 0,460<br>0,403 |
| <b>Parameters for LED and OLED light sources:</b>         |      |                                    |                |
| R9 colour rendering index value                           | 12   | Survival factor                    | 0,98           |
| the lumen maintenance factor                              | 0,97 |                                    |                |

(a) : not applicable;

(b) : not applicable;

**R4230**

**Light Source Test Report**

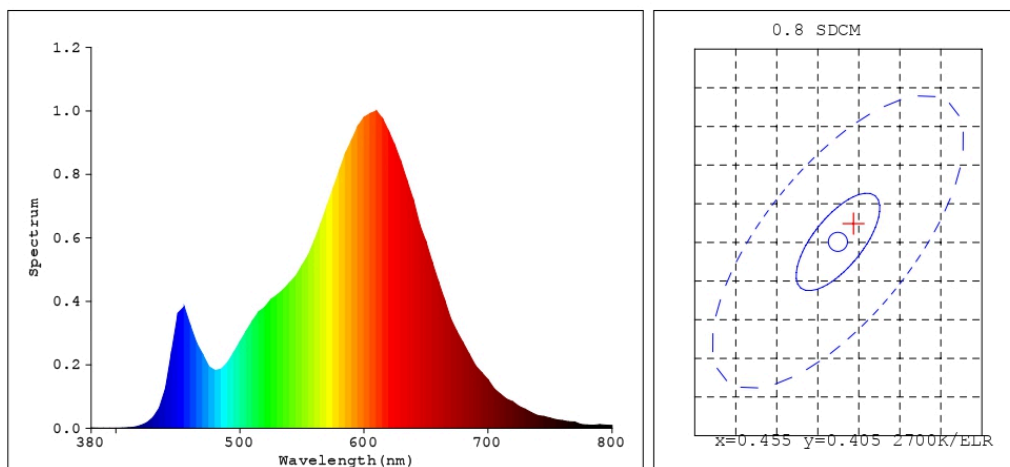

**Color Parameters:**

Chromaticity Coordinate:  $x=0.4566$   $y=0.4069$   
 Chromaticity Coordinate:  $u'=0.2621$   $v'=0.5254$  ( $duv=-1.11e-03$ )  
 Tc=2713K Dominant WL:Ld=582.7nm Purity=52.2% Centroid WL:590.0nm  
 Ratio:R=24.3% G=73.9% B=1.8% Peak WL:Lp=605.0nm HWL:137.7nm  
 Render Index:Ra=81.0  
 R1 =79 R2 =87 R3 =94 R4 =81 R5 =79 R6 =83 R7 =84  
 R8 =61 R9 =8 R10=70 R11=80 R12=67 R13=81 R14=96 R15=73

**Photo Parameters:**

Flux: 915.80 lm Fe: 1.5588 W Efficacy:99.20 lm/W

**Electrical Parameters:**

Luminaire: U=13.19V I=0.7001A P=9.232W PF=1.000


*Instrument Status:*

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=29856(G=5,D=59)  
 REF=18500(R=3) %=-0.071% PMT: 28.1 centigrade [26.5]

Product Type:R4230  
 Number:1  
 Temperature:25.3 deg  
 Test Operator:LENGYUNFEI  
 Software:V2.00.122

Manufacturer:UCOME  
 Test Department:UCOME  
 Humidity:65.0%  
 Test Date:2021-10-15 18:26:38  
 Instrument:PMS-80\_V1 (SN:YG107113N11110070)

Model placed on the Union market from 08/02/2021



**EPREL registration number:** 1118282

<https://eprel.ec.europa.eu/qr/1118282>

**Supplier:** Lampefeber A/S (Importer)

**Website:** [www.lampefeber.com](http://www.lampefeber.com)

**Customer care service:**

**Name:** Main Office

**Website:** [www.loom-design.com](http://www.loom-design.com)

**Email:** [mail@lampefeber.com](mailto:mail@lampefeber.com)

**Phone:** +4586361722

**Address:**

Lilleringvej 30  
8462 Harlev  
Denmark