

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** LOOM Design

**Supplier's address:** Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

**Model identifier:** 818-002

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	11	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	592 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2600...3800
On-mode power ( $P_{on}$ ), expressed in W	12,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,99
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0,00	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	60	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	1 300	
	Depth	37	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,458 0,410
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	1 031	Beam angle in degrees, or the range of beam angles that can be set	45
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	67	Survival factor	0,98
the lumen maintenance factor	0,97		

(a) : not applicable;

(b) : not applicable;

## Spectrum Test Report

Sample :  
 Specification : LZ-1147 3000k  
 Sample No. : 2  
 Manufacturer :


Date : 2024-04-17  
 Sam. Status :  
 Instrument : HaasSuite(EVERFINE)  
 Test by : XIAOXIN  
 Assessor : damin

### Test Condition

Temperature : 25.3Deg  
 WL Range : 380nm-780nm  
 Test Mode : Fast Test

RH : 65.0%  
 IP : 52767 (81%)  
 T : 272 ms  
 Sensitivity : High

### Spectrum

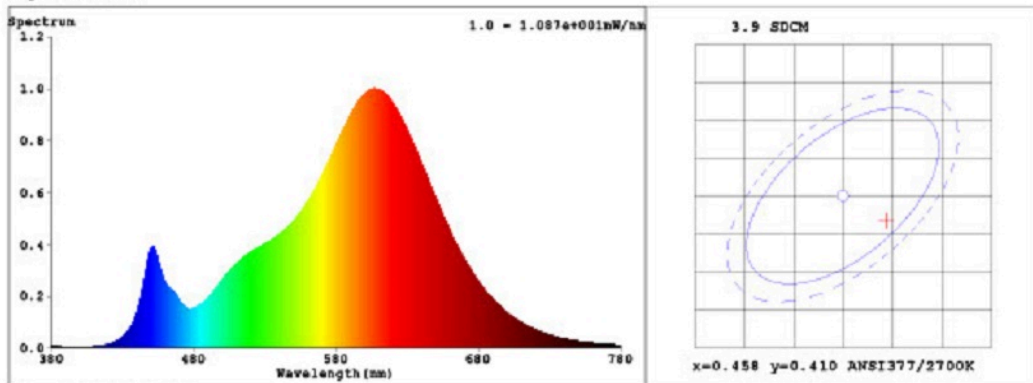

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4622$   $y = 0.4069$  /  $u' = 0.2657$   $v' = 0.5263$  ( $duv = -1.56e-03$ )

CCT= 2639K Prcp WL: Ld=585.0nm Purity=60.9%

Peak WL: Lp=607nm FWHM: =104.7nm Ratio:R=25.9% G=71.8% B=2.3%

Render Index: Ra = 82.4

R1 =82 R2 =93 R3 =93 R4 =80 R5 =83 R6 =94 R7 =79

R8 =55 R9 =5 R10=86 R11=81 R12=81 R13=85 R14=97 R15=73

LEVEL:OUT WHITE:ANSI\_2700K

### Photometric & Radiometric Parameters

Flux = 472.60 lm Eff. : 39.59 lm/W Fe = 1.4514 W


### Electrical parameters

V = 229.9 V I = 0.06790 A P = 11.94 W PF = 0.7646 F=49.99 Hz

**EVERFINE CORPORATION**

<http://www.everfine.cn>

Model placed on the Union market from 05/01/2024



**EPREL registration number:** 2018592

<https://eprel.ec.europa.eu/qr/2018592>

**Supplier:** Lampefeber A/S (Importer)

**Website:** [www.lampefeber.com](http://www.lampefeber.com)

**Customer care service:**

**Name:** Main Office

**Website:** [www.loom-design.com](http://www.loom-design.com)

**Email:** [mail@lampefeber.com](mailto:mail@lampefeber.com)

**Phone:** +4586361722

**Address:**

Lilleringvej 30  
8462 Harlev  
Denmark