

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 840-004

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	SMD		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:


Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	373 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 982
On-mode power (P_{on}), expressed in W	6,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	9	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	11	
	Depth	9	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,438 0,405
Parameters for LED and OLED light sources:			
R9 colour rendering index value	60	Survival factor	0,90
the lumen maintenance factor	0,97		

(a) : not applicable;

(b) : not applicable;

Light Source Test Report

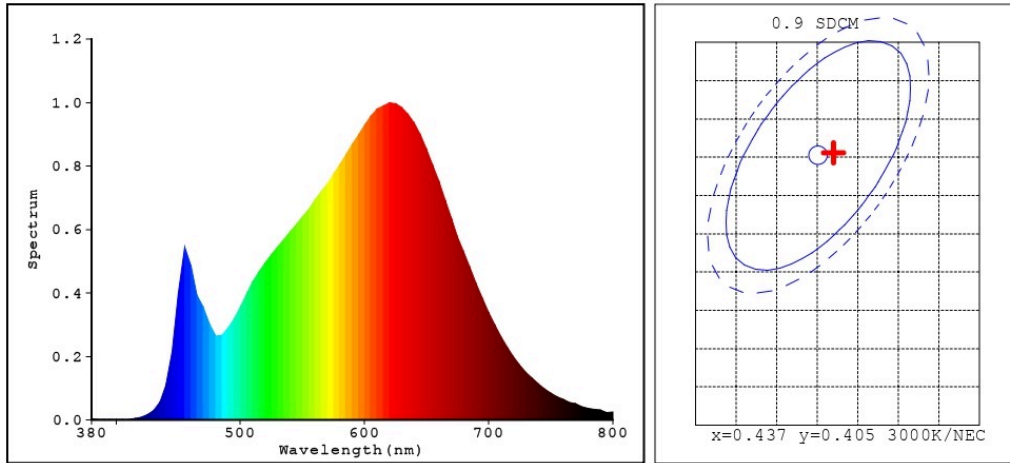

Color Parameters:

Chromaticity Coordinate: $x=0.4386$ $y=0.4053$
 Chromaticity Coordinate: $u'=0.2511$ $v'=0.5221$ ($duv=2.49e-04$)
 $Tc=2982K$ Dominant WL: $Ld=582.8nm$ Purity=53.3% Centroid WL: $602.0nm$
 Ratio: $R=25.9\%$ $G=71.3\%$ $B=2.7\%$ Peak WL: $Lp=620.0nm$ $HWL=161.8nm$
 Render Index: $Ra=92.6$ $CRI=89.7$
 R1 =93 R2 =97 R3 =99 R4 =91 R5 =92 R6 =96 R7 =91
 R8 =82 R9 =60 R10=92 R11=92 R12=77 R13=94 R14=99 R15=89

Photo Parameters:

Flux: 292.01 lm Fe: 1.0180 W Efficacy: 50.14 lm/W

Electrical Parameters:

Lamp : $U=229.86V$ $I=0.04828A$ $P=5.823W$ $PF=0.5247$


Instrument Status:

Scan Range: $380.0nm-800.0nm$ Interval: $5.0nm[0]$ $Ip=2190(G=3,D=51)$
 REF=3876 (R=4) $\%=-0.053\%$ $PMT: 19.9$ centigrade [20.2]

Product Type:
 Number:
 Temperature: 25.3 deg
 Test Operator: J01
 Software: V3.00.137

Manufacturer:
 Test Department:
 Humidity: 65.0%
 Test Date: 2021-11-23 08:46:03
 Instrument: PMS-50SSA_V1 (SN:1004060)

Model placed on the Union market from 01/03/2023



EPREL registration number: 1517757

<https://eprel.ec.europa.eu/qr/1517757>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark