

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 842-003

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	683 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	6,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, light-	Height	3 065	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	250	
	Depth	250	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,399 0,432
Parameters for LED and OLED light sources:			
R9 colour rendering index value	0	Survival factor	1,00
the lumen maintenance factor	-		

(a) '-': not applicable;

(b) '-': not applicable;

Lightsource Test Report

Product Information

Product Number: AP9378-1L

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4321$ $y=0.3997$ $u(u')=0.2493$ $v=0.3460$ $v'=0.5189$

CCT: $T_c=3047K$ ($duv=-0.00107$)

Color Ratio: $R=0.225$ $G=0.746$ $B=0.028$

Peak Wavelength: 602.9nm

Half Bandwidth: 120.6nm

Dominant Wavelength: 602.3nm

Color Purity: 0.497

CRI: $R_a=81.4$

TM30: $R_f=84$, $R_g=95$

GAI: $GAI_BB_8=94.2$, $GAI_BB_15=101.7$, $GAI_EES=55.3$


$R1=80$ $R2=92$ $R3=94$ $R4=79$ $R5=81$ $R6=90$ $R7=80$ $R8=55$

$R9=0$ $R10=81$ $R11=78$ $R12=73$ $R13=83$ $R14=98$ $R15=72$

Color Quality Scale: $Q_a=81.4$, $Q_f=83.0$, $Q_p=82.3$, $Q_g=90.4$

$Q1=77$ $Q2=95$ $Q3=83$ $Q4=79$ $Q5=82$ $Q6=83$ $Q7=83$ $Q8=85$

$Q9=95$ $Q10=90$ $Q11=86$ $Q12=82$ $Q13=81$ $Q14=70$ $Q15=72$

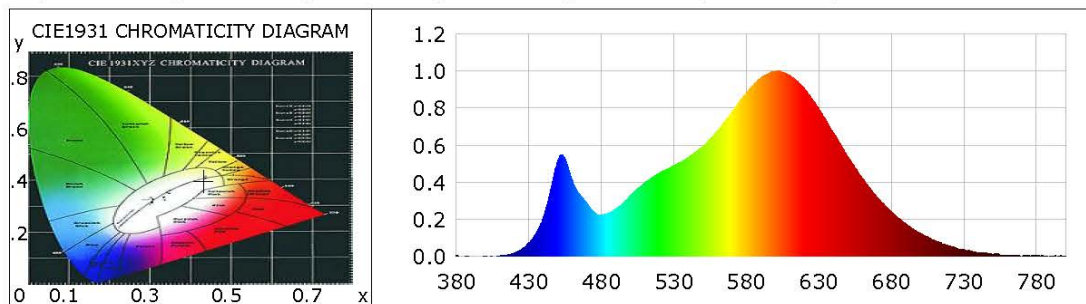

Photometric Parameters

Luminous Flux: 683.31 lm

Efficiency: 108.46 lm/W

Radiant Power: 2.040 W

EEI: 0.11

Energy Efficiency Class: A+ (EU 874-2012)

Electric Parameters

Voltage: 219.10V

Current: 0.0540A

Power: 6.30W

Power Factor: 0.5350

Frequency: 50.02Hz

Test Information

Scan Range: 380~800:1nm

Photometric Method: sphere-spectroradiometer

Stabilization Time: 0 ms ALC.: 1.0000

Photometric Condition: Sphere diameter: 1.00m, 4T

Max of Signal: 44853 (3538)

CCD Integration Time: 536.72 ms

Condition: $T_x:26.8^\circ C$, $T_i:0.0^\circ C$, R.H.:60%

Test Device: Inventfine CMS-2S (Plus)

Test Lab:

Test Time: 2023-09-16 19:37:35

Operator:

Inspector:

Model placed on the Union market from 01/03/2024



EPREL registration number: 1950204

<https://eprel.ec.europa.eu/qr/1950204>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark