

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 857-001

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	15	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	400 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	15,2	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	1 500	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	200	
	Depth	107	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,485 0,410
Parameters for LED and OLED light sources:			
R9 colour rendering index value	63	Survival factor	0,90
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,00	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	-

(a): not applicable;

(b): not applicable;



Lightsource Test Report


Product Information

Product Type: 857-001
Product Number: 12

Product Spec: 857-001

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4850$ $y=0.4098$ $u(u')=0.2792$ $v=0.3539$ $v'=0.5309$
 CCT: $T_c=2378K$ ($duv=-0.00161$) Color Ratio: $R=0.296$ $G=0.685$ $B=0.019$
 Peak Wavelength: 632.4nm Half Bandwidth: 133.8nm
 Dominant Wavelength: 586.6nm Color Purity: 0.686
 CRI: $R_a=93.4$, $avgR(1\sim14)=91.6$, $avgR(1\sim15)=91.5$ TM30: $R_f=92$, $R_g=102$
 GAI: $GAI_BB_8=108.8$, $GAI_BB_15=113.4$, $GAI_EES=41.3$
 R1 =94 R2 =97 R3 =99 R4 =94 R5 =94 R6 =97 R7 =90 R8 =82
 R9 =63 R10=93 R11=95 R12=90 R13=95 R14=99 R15=90
 Color Quality Scale: $Q_a=88.1$, $Q_f=91.1$, $Q_p=95.9$, $Q_g=96.2$
 Q1 =85 Q2 =92 Q3 =88 Q4 =88 Q5 =90 Q6 =88 Q7 =86 Q8 =87
 Q9 =93 Q10=91 Q11=90 Q12=89 Q13=89 Q14=86 Q15=85

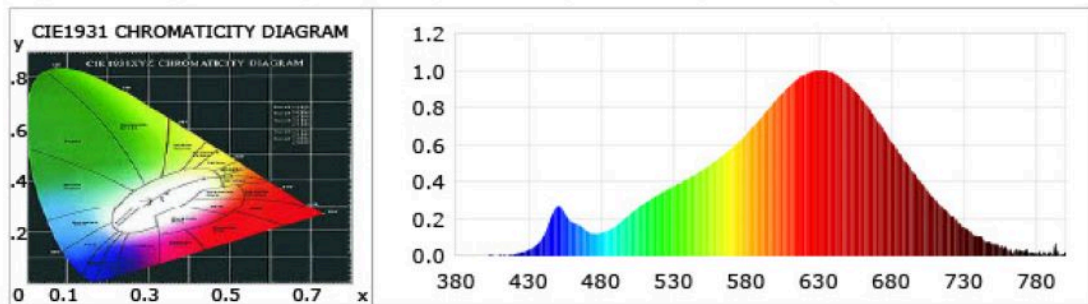

Photometric Parameters

Luminous Flux: 396.83 lm
EEI: 0.41
Pupil Flux: 436.53 Plm

Efficiency: 26.06 lm/W
Energy Efficiency Class: B (EU 874-2012)
Pupil Lumens Per Watt: 28.66 Plm/W

Radiant Power: 1.501 W
Pupil Factor (Kp): 1.100

Electric Parameters

Voltage: 220.30V
Power Factor: 0.9330

Current: 0.0740A
Frequency: 50.00Hz

Power: 15.23W

Test Information


Scan Range: 380~800:1nm
Stabilization Time: 0 Min ALC.: 1.0000
Max of Signal: 43898 (3666)

Photometric Method: sphere-spectroradiometer
Photometric Condition: Sphere diameter: 1.50m, 4 π
CCD Integration Time: 1000.00 ms

Condition: $T_x:28.6^\circ C$, $T_i:28.8^\circ C$, R.H.:60%
Test Lab: 中山市聚美灯饰照明有限公司
Operator: Dan

Test Device: Inventfine CMS-2S (Plus)
Test Time: 2024-06-12 10:34:33
Inspector:

Model placed on the Union market from 02/09/2024



EPREL registration number: 2118805

<https://eprel.ec.europa.eu/qr/2118805>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark