

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 860-002

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	Yes	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	233 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 629
On-mode power (P_{on}), expressed in W	10,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,00	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	278	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	133	
	Depth	133	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,460 0,410
Parameters for LED and OLED light sources:			
R9 colour rendering index value	90	Survival factor	0,90
the lumen maintenance factor	0,90		

(a) : not applicable;

(b) : not applicable;


Lightsource Test Report

Product Information

Product Type: PE-Avatar-1001-2700K-LFD250MA-WH Product Spec: PE-Avatar-1001-2700K-LFD250MA-WH12
Product Number: 12

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4683$ $y=0.4162$ $u(u')=0.2654$ $v=0.3538$ $v'=0.5308$
 CCT: $T_c=2629K$ ($duv=0.00141$) Color Ratio: $R=0.270$ $G=0.707$ $B=0.023$
 Peak Wavelength: 627.2nm Half Bandwidth: 141.4nm
 Dominant Wavelength: 584.1nm Color Purity: 0.656
 Central Wave: 611.3nm Gravity Wave: 616.5nm
 CRI: $R_a=93.2$, $avgR(1\sim14)=90.6$, $avgR(1\sim15)=90.4$ TM30: $R_f=92$, $R_g=97$
 GAI: $GAI_BB_8=91.5$, $GAI_BB_15=99.2$, $GAI_EES=42.4$
 R1 =93 R2 =97 R3 =99 R4 =93 R5 =93 R6 =97 R7 =91 R8 =81
 R9 =59 R10=92 R11=95 R12=83 R13=94 R14=99 R15=88 TLCI=91
 Color Quality Scale: $Q_a=91.1$, $Q_f=93.8$, $Q_p=93.0$, $Q_g=92.9$
 Q1 =88 Q2 =94 Q3 =91 Q4 =90 Q5 =91 Q6 =92 Q7 =93 Q8 =94
 Q9 =95 Q10=94 Q11=93 Q12=93 Q13=93 Q14=87 Q15=87

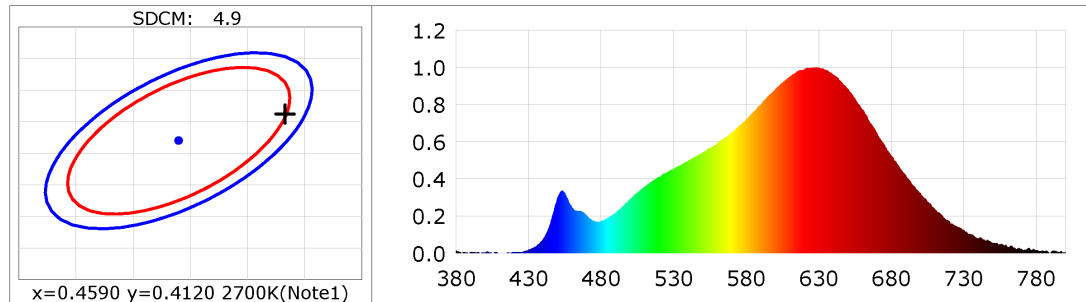

Photometric Parameters

Luminous Flux: 233.33 lm Efficiency: 23.06 lm/W Radiant Power: 0.817 W
 Total mains efficacy: 23.06 lm/W Energy Efficiency Class: G (EU 2019/2015)
 Pupil Flux: 277.12 Plm Pupil Lumens Per Watt: 27.38 Plm/W Pupil Factor (Kp): 1.188
 Cirtopic Flux: 487.68 lm Melanin Flux: 0.130 W M/R: 0.4619 MDER: 0.4203

Electric Parameters

Voltage: 220.40V Current: 0.0840A Power: 10.12W
 Power Factor: 0.5490 Frequency: 49.99Hz


Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min ALC.: 1.0000 Photometric Condition: Sphere diameter: 1.50m, 4IT
 Max of Signal: 45007 (3871) CCD Integration Time: 781.36 ms

Condition: $T_x:29.3^{\circ}C$, $T_i:27.9^{\circ}C$, R.H.:60%
 Test Lab:
 Operator:

Test Device: CMS-2S (Plus)
 Test Time: 2024-07-16 14:24:05
 Inspector:

Model placed on the Union market from 01/03/2025



EPREL registration number: 2305561

<https://eprel.ec.europa.eu/qr/2305561>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark