

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** LOOM Design

**Supplier's address:** Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

**Model identifier:** 862-004

**Type of light source:**

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	Yes	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	G
Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	507 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{\text{on}}$ ), expressed in W	10,0	Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal	0,50
Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,460 0,410	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	507	Beam angle in degrees, or the range of beam angles that can be set	36	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	90	Survival factor	0,90	
the lumen maintenance factor	0,80			

(a) '-': not applicable;

(b) '-': not applicable;

## Lightsource Test Report

### Product Information

Product Type: SU-STAR-1203-BRI2790(V6)-EAG250M Product Number: 212


### CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.4552$   $y=0.4125$   $u(u')=0.2587$   $v=0.3516$   $v'=0.5274$   
CCT:  $T_c=2781K$  ( $duv=0.00113$ ) Color Ratio:  $R=0.258$   $G=0.721$   $B=0.020$   
Peak Wavelength: 632.8nm Half Bandwidth: 157.9nm  
Dominant Wavelength: 583.4nm Color Purity: 0.605  
Central Wave: 608.5nm Gravity Wave: 616.6nm  
CRI:  $R_a=93.1$ ,  $avgR(1\sim14)=90.4$ ,  $avgR(1\sim15)=90.5$  TM30:  $R_f=91$ ,  $R_g=103$   
GAI:  $GAI\_BB\_8=98.5$ ,  $GAI\_BB\_15=102.4$ ,  $GAI\_EES=50.3$   

R1 =95	R2 =94	R3 =91	R4 =95	R5 =93	R6 =92	R7 =95	R8 =90
R9 =75	R10=84	R11=95	R12=78	R13=94	R14=94	R15=93	TLCI=90

Color Quality Scale:  $Q_a=90.7$ ,  $Q_f=92.0$ ,  $Q_p=94.0$ ,  $Q_g=98.7$   

Q1 =90	Q2 =97	Q3 =87	Q4 =89	Q5 =90	Q6 =87	Q7 =88	Q8 =93
Q9 =95	Q10=92	Q11=93	Q12=94	Q13=95	Q14=91	Q15=90	

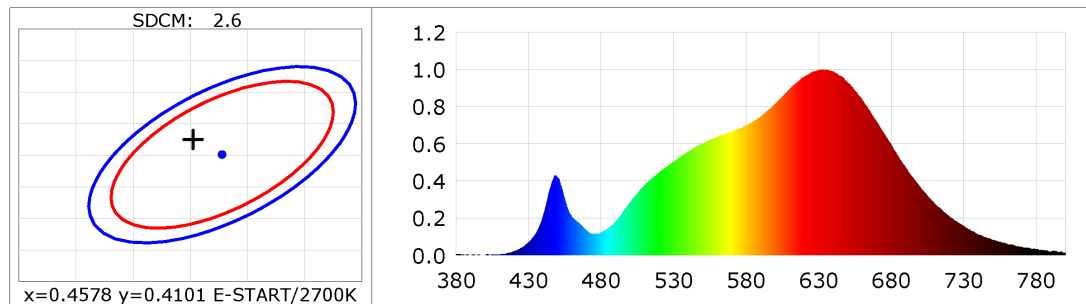

### Photometric Parameters

Luminous Flux: 578.49 lm	Efficiency: 55.04 lm/W	Radiant Power: 2.087 W
Total mains efficacy: 55.04 lm/W	Energy Efficiency Class: G (EU 2019/2015)	
Pupil Flux: 698.35 Plm	Pupil Lumens Per Watt: 66.45 Plm/W	Pupil Factor (Kp): 1.207
Cirtopic Flux: 1215.94 lm	Melanin Flux: 0.323 W	M/R: 0.4645
		MDER: 0.4227

### Electric Parameters

Voltage: 220.60V	Current: 0.0800A	Power: 10.51W
Power Factor: 0.5940	Frequency: 49.99Hz	


### Test Information

Scan Range: 380~800:1nm	Photometric Method: sphere-spectroradiometer
Stabilization Time: 0 Min	Photometric Condition: Sphere diameter: 1.50m, 4T
Max of Signal: 48807 (2601)	ALC.: 1.0000
	CCD Integration Time: 447.89 ms

Condition: Tx:23.5'C, Ti:21.5'C, R.H.:60%  
Test Lab:  
Operator:

Test Device: CMS-2S (Plus)  
Test Time: 2025-03-11 09:49:51  
Inspector:

Model placed on the Union market from 01/04/2025



**EPREL registration number:** 2338811

<https://eprel.ec.europa.eu/qr/2338811>

**Supplier:** Lampefeber A/S (Importer)

**Website:** [www.lampefeber.com](http://www.lampefeber.com)

**Customer care service:**

**Name:** Main Office

**Website:** [www.loom-design.com](http://www.loom-design.com)

**Email:** [mail@lampefeber.com](mailto:mail@lampefeber.com)

**Phone:** +4586361722

**Address:**

Lilleringvej 30  
8462 Harlev  
Denmark