

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 865-001

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	52	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 670 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 721
On-mode power (P_{on}), expressed in W	52,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	92
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,465 0,423	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	59	Survival factor	0,97	
the lumen maintenance factor	0,96			

(a) '-': not applicable;

(b) '-': not applicable;



Lightsource Test Report


Product Information

Product Type: 865-001

Product Number: 7

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4654$ $y=0.4232$ $u(u')=0.2604$ $v=0.3553$ $v'=0.5329$
 CCT: $T_c=2721K$ ($duv=0.00412$) Color Ratio: $R=0.259$ $G=0.719$ $B=0.022$
 Peak Wavelength: 627.1nm Half Bandwidth: 154.9nm
 Dominant Wavelength: 582.9nm Color Purity: 0.667
 CRI: $R_a=92.0$, $avgR(1\sim14)=88.7$, $avgR(1\sim15)=88.6$ TM30: $R_f=91$, $R_g=96$
 GAI: $GAI_BB_8=81.5$, $GAI_BB_15=89.4$, $GAI_EES=40.1$
 R1 =92 R2 =94 R3 =97 R4 =93 R5 =91 R6 =94 R7 =93 R8 =83
 R9 =59 R10=86 R11=93 R12=77 R13=92 R14=97 R15=87
 Color Quality Scale: $Q_a=89.8$, $Q_f=92.2$, $Q_p=90.5$, $Q_g=90.7$
 Q1 =88 Q2 =95 Q3 =91 Q4 =90 Q5 =91 Q6 =91 Q7 =92 Q8 =93
 Q9 =91 Q10=87 Q11=88 Q12=90 Q13=92 Q14=86 Q15=88

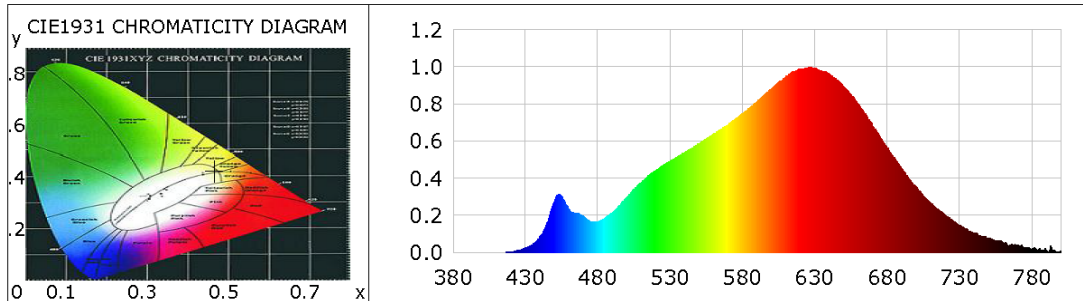

Photometric Parameters

Luminous Flux: 1670.0 lm
 EEI: 0.42
 Pupil Flux: 1990.92 Plm

Efficiency: 32.39 lm/W
 Energy Efficiency Class: B (EU 874-2012)
 Pupil Lumens Per Watt: 38.61 Plm/W

Radiant Power: 5.839 W
 Pupil Factor (Kp): 1.192

Electric Parameters

Voltage: 220.90V
 Power Factor: 0.9730

Current: 0.2400A
 Frequency: 49.99Hz

Power: 51.56W

Test Information


Scan Range: 380~800:1nm
 Stabilization Time: 1 Min ALC.: 1.0000
 Max of Signal: 51506 (3779)

Photometric Method: sphere-spectroradiometer
 Photometric Condition: Sphere diameter: 1.50m, 4T
 CCD Integration Time: 345.91 ms

Condition: $T_x:34.3^{\circ}C$, $T_i:32.8^{\circ}C$, R.H.:60%
 Test Lab: 中山市聚美灯饰照明有限公司
 Operator: Dan

Test Device: Inventfine CMS-2S (Plus)
 Test Time: 2024-09-05 16:00:19
 Inspector:

Model placed on the Union market from 01/03/2025



EPREL registration number: 2301211

<https://eprel.ec.europa.eu/qr/2301211>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark