

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 866-002

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter		Value	Parameter	Value
General product parameters:				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		9	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		286 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 773
On-mode power (P_{on}), expressed in W		9,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	54	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	150		
	Depth	150		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,455 0,412	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	61	Survival factor	0,97	
the lumen maintenance factor	0,96			

(a) '-': not applicable;

(b) '-': not applicable;



Lightsource Test Report


Product Information

Product Type: 866-002WH

Product Number: 3

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4557$ $y=0.4124$ $u(u')=0.2591$ $v=0.3516$ $v'=0.5274$
 CCT: $T_c=2773K$ ($duv=0.00102$) Color Ratio: $R=0.259$ $G=0.717$ $B=0.024$
 Peak Wavelength: 622.0nm Half Bandwidth: 153.2nm
 Dominant Wavelength: 583.5nm Color Purity: 0.606
 CRI: $R_a=93.2$, $avgR(1\sim14)=90.7$, $avgR(1\sim15)=90.5$ TM30: $R_f=93$, $R_g=100$
 GAI: $GAI_BB_8=95.6$, $GAI_BB_15=100.4$, $GAI_EES=48.6$
 R1 =93 R2 =96 R3 =97 R4 =95 R5 =93 R6 =96 R7 =92 R8 =83
 R9 =61 R10=90 R11=96 R12=85 R13=94 R14=98 R15=89
 Color Quality Scale: $Q_a=91.7$, $Q_f=93.7$, $Q_p=93.6$, $Q_g=95.6$
 Q1 =89 Q2 =96 Q3 =91 Q4 =91 Q5 =93 Q6 =92 Q7 =92 Q8 =94
 Q9 =97 Q10=95 Q11=94 Q12=94 Q13=93 Q14=87 Q15=88

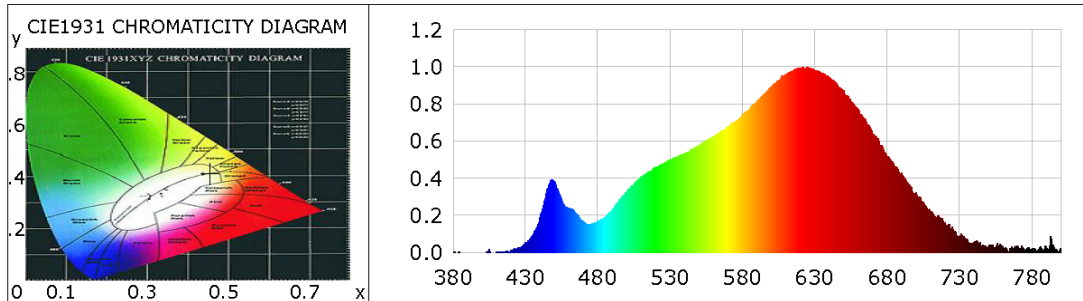

Photometric Parameters

Luminous Flux: 286.12 lm
 EEI: 0.30
 Pupil Flux: 352.01 Plm

Efficiency: 32.66 lm/W
 Energy Efficiency Class: B (EU 874-2012)
 Pupil Lumens Per Watt: 40.18 Plm/W

Radiant Power: 0.987 W
 Pupil Factor (Kp): 1.230

Electric Parameters

Voltage: 220.90V
 Power Factor: 0.9720

Current: 0.0410A
 Frequency: 49.99Hz

Power: 8.76W

Test Information


Scan Range: 380~800:1nm
 Stabilization Time: 1 Min ALC.: 1.0000
 Max of Signal: 26261 (4581)

Photometric Method: sphere-spectroradiometer
 Photometric Condition: Sphere diameter: 1.50m, 4T
 CCD Integration Time: 1000.00 ms

Condition: $T_x:33.3^{\circ}C$, $T_i:32.6^{\circ}C$, R.H.:60%
 Test Lab: 中山市聚美灯饰照明有限公司
 Operator: Dan

Test Device: Inventfine CMS-2S (Plus)
 Test Time: 2024-09-05 15:15:50
 Inspector:

Model placed on the Union market from 01/03/2025



EPREL registration number: 2301282

<https://eprel.ec.europa.eu/qr/2301282>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark