

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** LOOM Design

**Supplier's address:** Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

**Model identifier:** 872-001

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:


Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	334 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	10,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	70	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	180	
	Depth	120	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,458 0,410
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	50	Survival factor	1,00
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a): not applicable;

(b): not applicable;

**Spectrum Test Report**

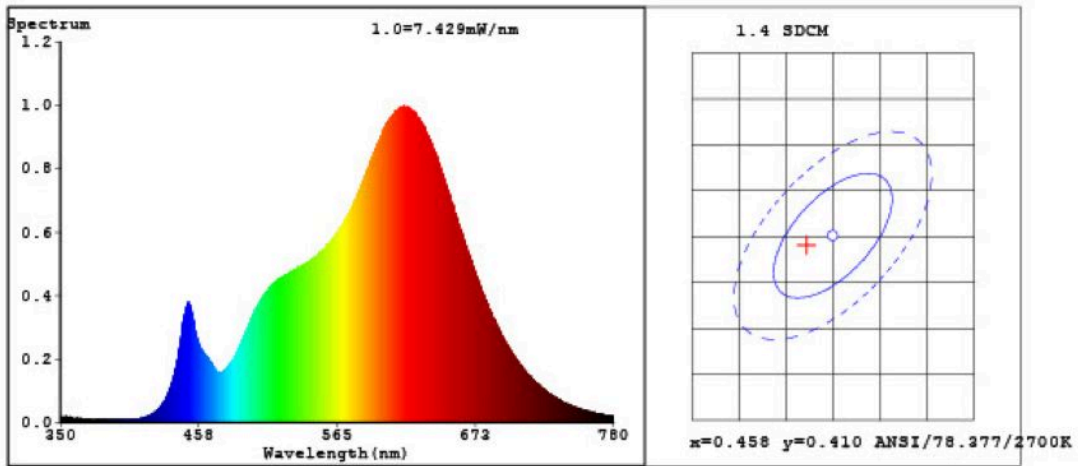

**Color Parameters:**

Chromaticity Coordinate:  $x=0.4550$   $y=0.4091$   $u'=0.2601$   $v'=0.5261$   
 CCT=2757K(Duv=-0.0001) Dominant WL:Ld =584.0nm Purity=59.4%  
 Ratio:R=26.3% G=71.1% B=2.6% Peak WL:Lp=617.3nm FWHM=131.7nm  
 Render Index:Ra=93.0  
 R1 =94 R2 =98 R3 =98 R4 =95 R5 =95 R6 =97 R7 =90  
 R8 =77 R9 =50 R10=95 R11=98 R12=91 R13=95 R14=100 R15=87

**Photo Parameters:**

Flux = 334.1 lm Eff. : 32.57 lm/W Fe = 1.120 W

**Electrical parameters:**


V = 219.87 V I = 0.04867 A P = 10.26 W PF = 0.9583

Status: Integral T = 1104 ms Ip = 48520 (74%)

Model:WWV180R10TFA211-A1  
 Tester:彭金英  
 Temperature:25.3Deg  
 Manufacturer:SAT

Number:WWV180R10TFA211-A1  
 Date:2025-01-02 13:53:13  
 Humidity:51%  
 Remarks:

Model placed on the Union market from 03/03/2025



**EPREL registration number:** 2234899

<https://eprel.ec.europa.eu/qr/2234899>

**Supplier:** Lampefeber A/S (Importer)

**Website:** [www.lampefeber.com](http://www.lampefeber.com)

**Customer care service:**

**Name:** Main Office

**Website:** [www.loom-design.com](http://www.loom-design.com)

**Email:** [mail@lampefeber.com](mailto:mail@lampefeber.com)

**Phone:** +4586361722

**Address:**

Lilleringvej 30  
8462 Harlev  
Denmark