

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** LOOM Design

**Supplier's address:** Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

**Model identifier:** 875-006

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:


Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	26	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere ( $360^\circ$ ), in a wide cone ( $120^\circ$ ) or in a narrow cone ( $90^\circ$ )	1 510 in Sphere ( $360^\circ$ )	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	26,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	95	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	350	
	Depth	350	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,458 0,410
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	59	Survival factor	1,00
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,85	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a): not applicable;

(b): not applicable;

Spectrum Test Report

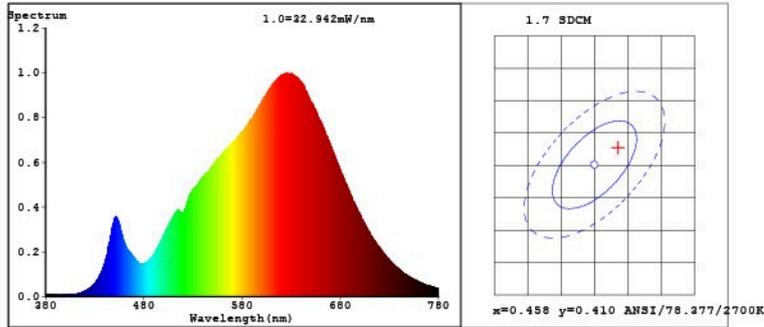

Color Parameters:

Chromaticity Coordinate:  $x=0.4614$   $y=0.4128/u'=0.2625$   $v'=0.5284$   
 CCT=2696K(Duv=0.0007) Dominant WL:Ld =584.0nm Purity=62.4%  
 Ratio:R=26.2% G=71.7% B=2.1% Peak WL:Lp=624.0nm FWHM=152.1nm  
 Render Index:Ra=91.2 TM30:Rf=90 Rg=100  
 R1 =91 R2 =94 R3 =95 R4 =91 R5 =90 R6 =92 R7 =93  
 R8 =82 R9 =59 R10=85 R11=91 R12=79 R13=92 R14=96 R15=88

Photo Parameters:

Flux = 1510 lm Eff. : 56.96 lm/W Fe = 5.400 W

Electrical parameters:

V = 219.46 V I = 0.2518 A P = 26.51 W PF = 0.4798

Status: Integral T = 264 ms Ip = 41234 (63%)

Model:SLV350J  
 Tester:彭金英  
 Temperature:25.3Deg  
 Manufacturer:SAT

Number:SLV350J  
 Date:2025-09-15 14:26:30  
 Humidity:51%  
 Remarks:系数1.089

Model placed on the Union market from 12/12/2025.



**EPREL registration number:** 2572701

<https://eprel.ec.europa.eu/qr/2572701>

**Supplier:** Lampefeber A/S (Importer)

**Website:** [www.lampefeber.com](http://www.lampefeber.com)

**Customer care service:**

**Name:** Main Office

**Website:** [www.loom-design.com](http://www.loom-design.com)

**Email:** [mail@lampefeber.com](mailto:mail@lampefeber.com)

**Phone:** +4586361722

**Address:**

Lilleringvej 30  
8462 Harlev  
Denmark