Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 875-007

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	30	Energy efficiency class	G
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	1 882 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	30,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	150	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	350		
	Depth	350		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[a]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,458 0,410
Parameters for LED and OLED light sources:				
R9 colour rendering index value		59	Survival factor	1,00
the lumen maintenance factor		0,96		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,90	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[b]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,0	Stroboscopic effect metric (SVM)	0,0

[a] '-' : not applicable;

[b] '-' : not applicable;

Spectrum Test Report

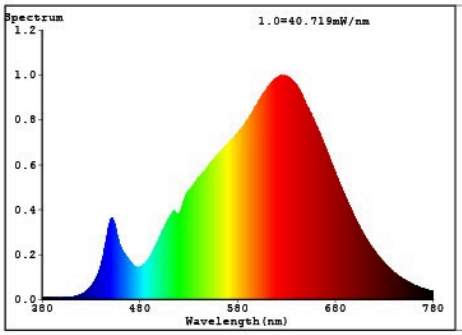



Color Parameters:

Chromaticity Coordinate:x=0.4608 y=0.4142/u'=0.2615 v'=0.5288
CCT=2715K(Duv=0.0012) Dominant WL:Ld =583.7nm Purity=62.6%
Ratio:R=26.0% G=71.9% B=2.1% Peak WL:Lp=624.7nm FWHM=153.8nm
Render Index:Ra=90.9 TM30:Rf=90 Rg=100

R1 =91	R2 =94	R3 =95	R4 =91	R5 =90	R6 =92	R7 =93	
R8 =82	R9 =59	R10=84	R11=90	R12=77	R13=91	R14=96	R15=88

Photo Parameters:

Flux = 1882 lm Eff. : 61.84 lm/W Fe = 6.689 W

Electrical parameters:

V = 220.07 V I = 0.1401 A P = 30.44 W PF = 0.9874

Status: Integral T = 186 ms Ip = 37219 (57%)

Model:SAV350J 香槟金	Number:SAV350J 香槟金
Tester:彭金英	Date:2025-08-25 09:51:45
Temperature:25.3Deg	Humidity:51%
Manufacturer:SAT	Remarks:系数1.05

Model placed on the Union market from 12/12/2025.

EPREL registration number: 2572807

https://eprel.ec.europa.eu/qr/2572807

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:
Lilleringvej 30
8462 Harlev
Denmark