

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 883-001

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:


Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	60	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 995 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	60,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control	Height	60	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	23	
	Depth	600	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,458 0,410
Parameters for LED and OLED light sources:			
R9 colour rendering index value	67	Survival factor	1,00
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a)-: not applicable;

(b)-: not applicable;

Spectrum Test Report

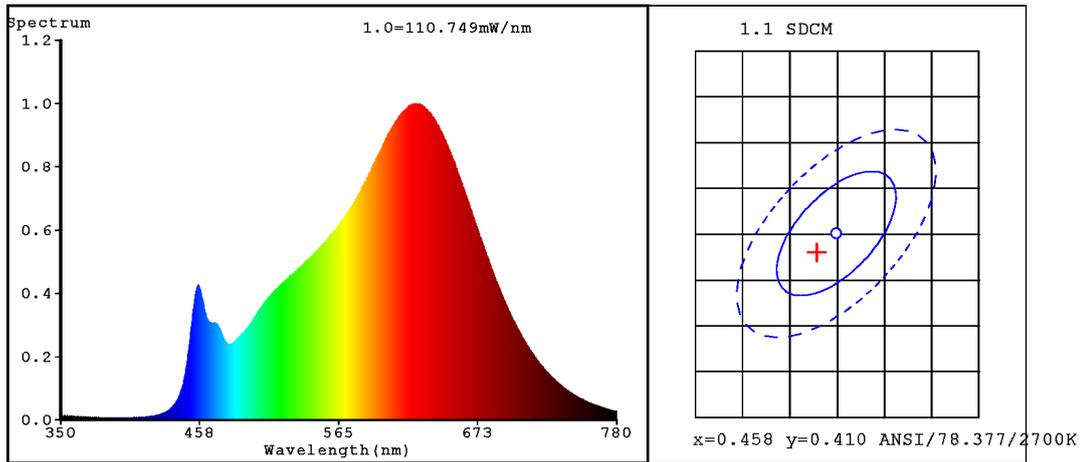

Color Parameters:

Chromaticity Coordinate: $x=0.4557$ $y=0.4080$ $u'=0.2610$ $v'=0.5257$
 CCT=2739K (Duv=-0.0006) Dominant WL:Ld =584.2nm Purity=59.3%
 Ratio:R=26.6% G=70.5% B=2.9% Peak WL:Lp=628.2nm FWHM=141.8nm
 Render Index:Ra=94.2 TM30:Rf=90 Rg=98
 R1 =97 R2 =99 R3 =97 R4 =95 R5 =96 R6 =96 R7 =91
 R8 =84 R9 =67 R10=100 R11=97 R12=84 R13=98 R14=99 R15=92

Photo Parameters:

Flux = 4995 lm Eff. : 119.22 lm/W Fe = 17.85 W

Electrical parameters:

V = 23.999 V I = 1.746 A P = 41.90 W PF = 1.000

Status: Integral T = 65 ms Ip = 35077 (54%)

Model:3-SLV600P600FA222-A1
 Tester:彭金英
 Temperature:25.3Deg
 Manufacturer:SAT

Number:3-SLV600P600FA222-A1
 Date:2026-01-19 16:19:49
 Humidity:51%
 Remarks:

Model placed on the Union market from 16/01/2026.



EPREL registration number: 2604857

<https://eprel.ec.europa.eu/qr/2604857>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark