

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: IP44.de

Supplier's address: Verwaltung, Mühlenstraße 20, 33378 Rheda-Wiedenbrück, DE

Model identifier: slat spike deep black 2700K

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Non-replaceable luminescence light sources		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes


Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	280 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	8,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,35
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	250	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	220	
	Depth	50	
			See image in last page


ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,458 0,410
Parameters for directional light sources:			
Peak luminous intensity (cd)	149	Beam angle in degrees, or the range of beam angles that can be set	77
Parameters for LED and OLED light sources:			
R9 colour rendering index value	10	Survival factor	0,10
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,95	Colour consistency in McAdam ellipses	4
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a)'.': not applicable;

(b)'.': not applicable;

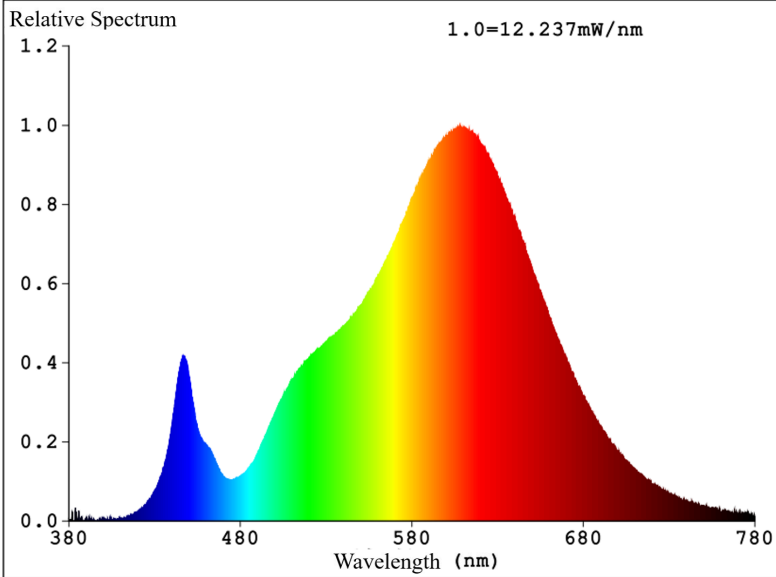


Color Tolerance 1.6 SDCM

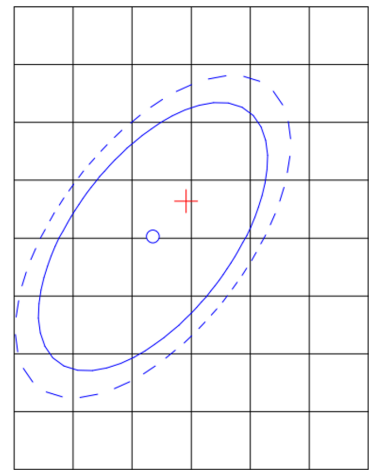

x=0.458 y=0.410 2700K (Note1)

Model placed on the Union market from 01/04/2022



EPREL registration number: 1340245

<https://eprel.ec.europa.eu/qr/1340245>

Supplier: IP44 Schmalhorst GmbH & Co. KG (Manufacturer)

Website: www.IP44.de

Customer care service:

Name: Verwaltung

Website: www.IP44.de

Email: welcome@IP44.de

Phone: +49 5242 57970

Address:

Mühlenstraße 20
33378 Rheda-Wiedenbrück
Germany