

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 867-001

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	221 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 638
On-mode power (P_{on}), expressed in W	8,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	155	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	70	
	Depth	180	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,466 0,413
Parameters for LED and OLED light sources:			
R9 colour rendering index value	57	Survival factor	0,97
the lumen maintenance factor	0,96		

(a) : not applicable;

(b) : not applicable;



Lightsource Test Report


Product Infomation

Product Type: SCL0041-01B-008

Product Number: 22

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4658$ $y=0.4132$ $u(u')=0.2652$ $v=0.3528$ $v'=0.5292$
 CCT: $T_c=2638K$ ($duv=0.00048$) Color Ratio: $R=0.271$ $G=0.706$ $B=0.022$
 Peak Wavelength: 623.1nm Half Bandwidth: 133.3nm
 Dominant Wavelength: 584.4nm Color Purity: 0.639
 CRI: $R_a=93.3$, $avgR(1\sim14)=91.0$, $avgR(1\sim15)=90.8$ TM30: $R_f=93$, $R_g=100$
 GAI: $GAI_BB_8=97.3$, $GAI_BB_15=101.2$, $GAI_EES=45.4$
 R1 =94 R2 =96 R3 =99 R4 =95 R5 =94 R6 =97 R7 =91 R8 =80
 R9 =57 R10=92 R11=97 R12=89 R13=94 R14=98 R15=88
 Color Quality Scale: $Q_a=90.9$, $Q_f=93.5$, $Q_p=93.4$, $Q_g=95.3$
 Q1 =86 Q2 =94 Q3 =91 Q4 =93 Q5 =93 Q6 =91 Q7 =92 Q8 =93
 Q9 =96 Q10=94 Q11=94 Q12=94 Q13=93 Q14=86 Q15=86

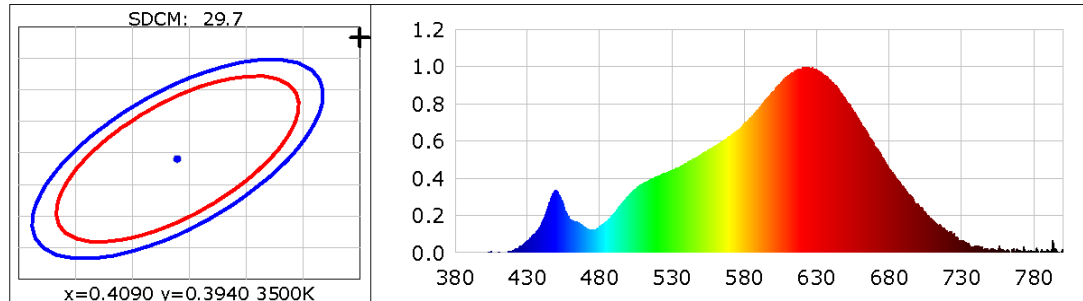

Photometric Parameters

Luminous Flux: 280.21 lm Efficiency: 38.38 lm/W Radiant Power: 0.949 W
 EEI: 0.26 Energy Efficiency Class: B (EU 874-2012)
 Pupil Flux: 333.44 Plm Pupil Lumens Per Watt: 45.68 Plm/W Pupil Factor (Kp): 1.190

Electric Parameters

Voltage: 220.60V Current: 0.0360A Power: 7.30W
 Power Factor: 0.9240 Frequency: 60.00Hz


Test Infomation

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 1 Min ALC.: 1.0000 Photometric Condition: Sphere diameter: 1.50m, 4T
 Max of Signal: 26826 (2993) CCD Integration Time: 1000.00 ms

Condition: $T_x:24.1^{\circ}C$, $T_i:23.0^{\circ}C$, R.H.:60%
 Test Lab: 中山市聚美灯饰照明有限公司
 Operator: Dan

Test Device: Inventfine CMS-2S (Plus)
 Test Time: 2024-11-27 16:48:38
 Inspector:

Model placed on the Union market from 10/03/2025



EPREL registration number: 2299118

<https://eprel.ec.europa.eu/qr/2299118>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark