

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** IP44.de

**Supplier's address:** Verwaltung, Mühlenstraße 20, 33378 Rheda-Wiedenbrück, DE

**Model identifier:** in S symmetric 2700K

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Non-replaceable luminescence light sources		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes



## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	574 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	8,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,30
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	104	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	110	
	Depth	110	
			See image in last page


ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,459 0,412
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	759	Beam angle in degrees, or the range of beam angles that can be set	44
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	10	Survival factor	0,10
the lumen maintenance factor	0,99		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,97	Colour consistency in McAdam ellipses	2
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. <sup>(b)</sup>	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a)'.': not applicable;

(b)'.': not applicable;

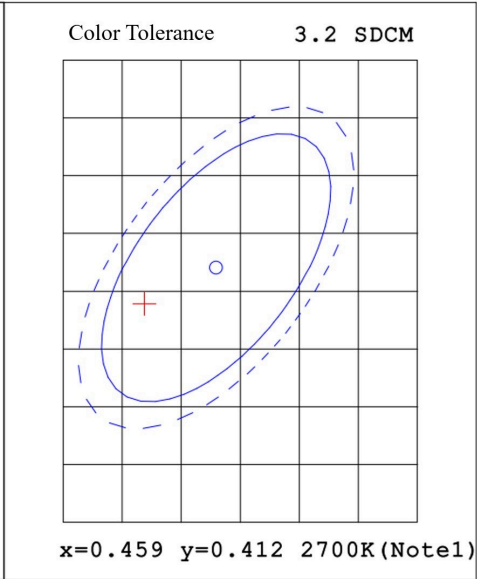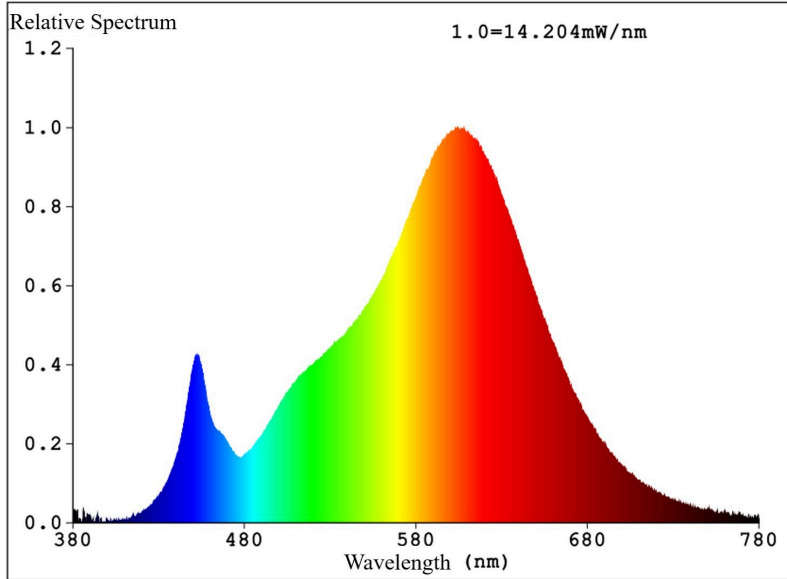

Model placed on the Union market from 01/04/2022



**EPREL registration number:** 1334401

<https://eprel.ec.europa.eu/qr/1334401>

**Supplier:** IP44 Schmalhorst GmbH & Co. KG (Manufacturer)

**Website:** [www.IP44.de](http://www.IP44.de)

**Customer care service:**

**Name:** Verwaltung

**Website:** [www.IP44.de](http://www.IP44.de)

**Email:** [welcome@IP44.de](mailto:welcome@IP44.de)

**Phone:** +49 5242 57970

**Address:**

Mühlenstraße 20  
33378 Rheda-Wiedenbrück  
Germany